


strip rl 80 s

Adhesive sealing strip for joints and corners.

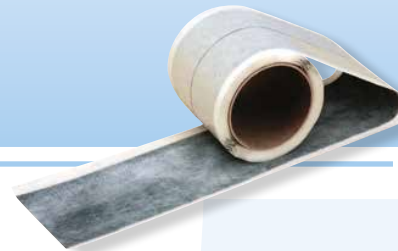

APPEARANCE

10 lm rolls

40 x 40 cm pieces


STORAGE

In dry place, protected from sunlight and high temperatures

FIELDS OF USE

- Watertight treatment for corners between walls and floors, wall to wall corners and for sealing joints between special pieces, such as: gullies, drains, spot lamps, etc., for waterproofing treatments using RASOLASTIK, RASOLASTIK ADV HD and RASOGUM to be covered by ceramic tiles.

APPLICATION OPERATIONS

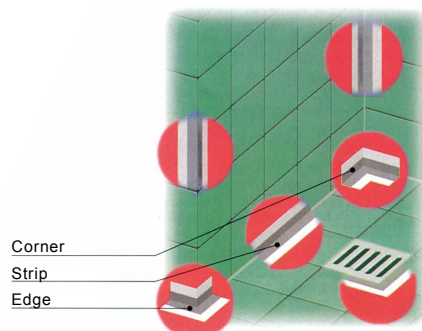

Strip RL 80 is applied straight to the substrate, which must be perfectly dry and dust-free. Special pieces are not required in corners. Just cut strip to middle and fold over. It is advisable to proceed by removing half the protective film while positioning the strip on the substrate.

After this, remove the remaining part of the protective film and then press firmly down to ensure that the strip adheres properly.




Alternatively, the strip can be applied to the first coat of waterproofing product when this is perfectly dry. The second coat can be applied immediately.

NATURE OF THE PRODUCT

Textile part: 100% non-woven polypropylene fiber fabric.

Rubber part: Butyl rubber.



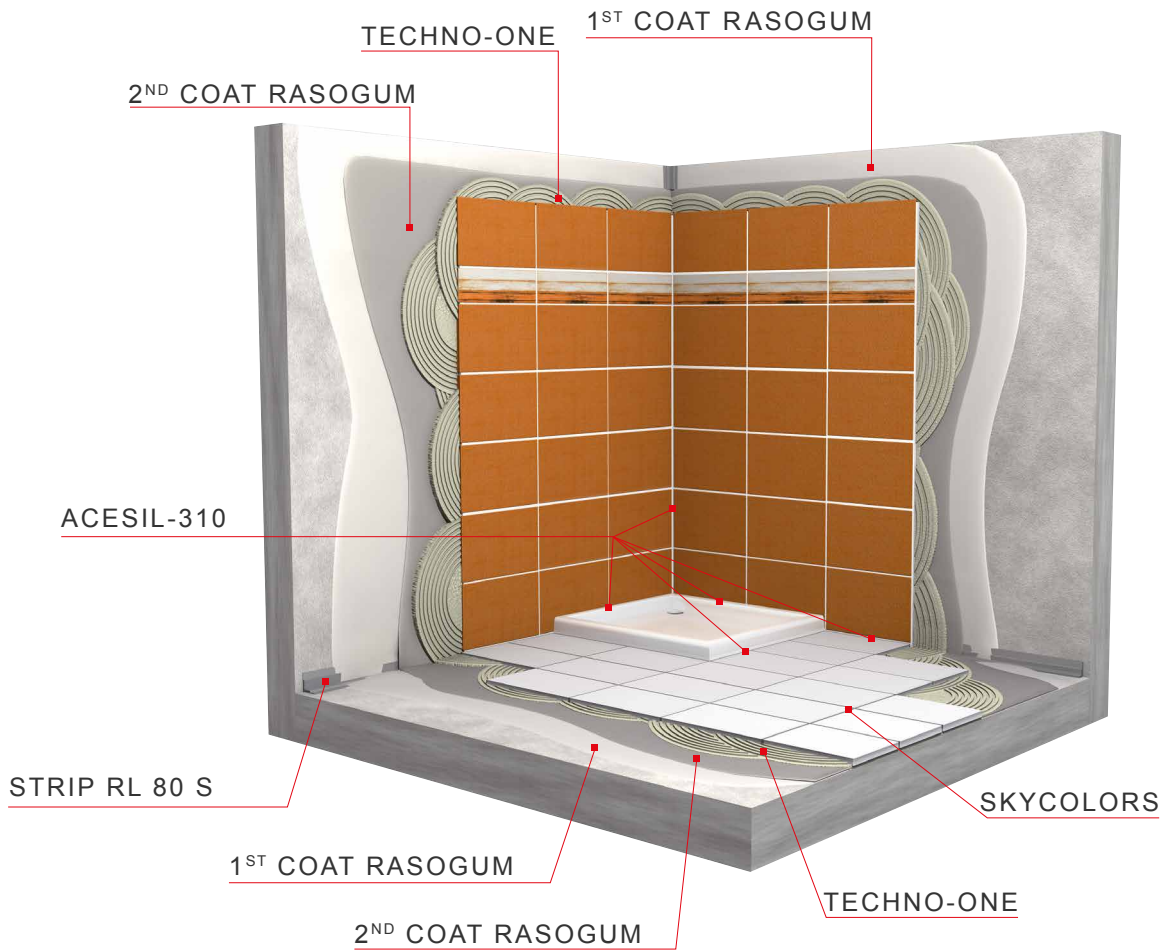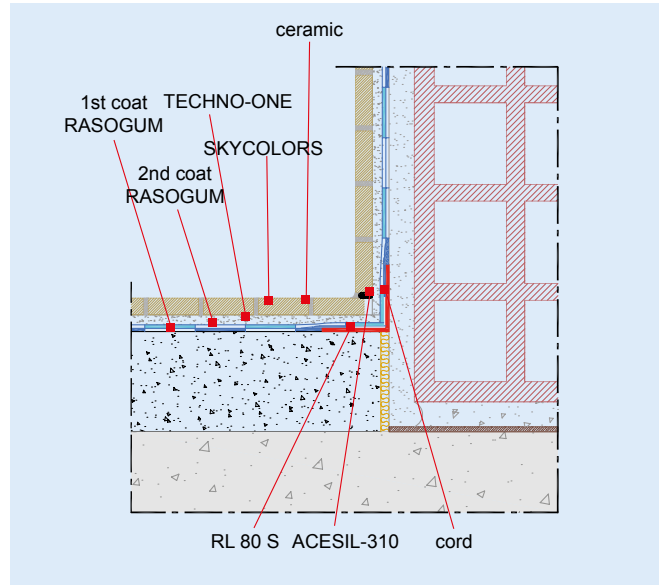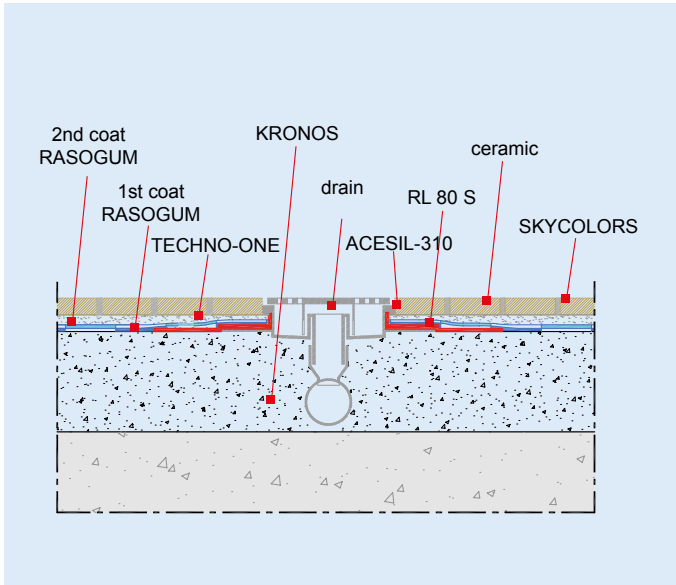

strip rl 80 s

TECHNICAL DATA	VALUE
Rubber colour	grey
Total width	approx. 85 mm
Adhesive rubber width	approx. 80 mm
Application temperature	min. + 5°C max + 40°C
Temperature during use	min. - 30°C max + 80°C

WARNINGS AND RECOMMENDATIONS

- the surfaces must be clean, dry and dust-free before they can be sealed
- is not recommended for use in the pool
- before use, make sure that sealing strip is compatible with the surfaces in terms of: bond and chemical compatibility
- do not use on substrates subject to rising damp

Technokolla reminds you to examine the “**notes**” document that completes the information in this data sheet. The document can be downloaded in the pdf format from the website www.technokolla.com.

The advice about technical matters in the technical data sheets, or given verbally or in writing by our personnel as part of our customer assistance service, is the result of our best and most up to date experience. Since we are unable to personally modify the conditions in the building site or the way the work is carried out, this information is purely indicative and, thus, binds us neither legally nor in any other way in relation third parties. This information does not relieve the end user from being responsible for testing our products so as to make sure they are fit for the required use. We therefore strongly advise the customer/user to subject Technokolla's products to preventive tests in order to ensure that they are suitable. The end user is also responsible for checking to make sure that this technical data sheet is not obsolete and that more recent editions have not replaced it. Thus, before using our products, you are advised to download the most up to date version of the technical data sheet from our web site www.technokolla.com.



Sika Italia S.p.A.

Registered Office and Administrative Headquarters: Via L. Einaudi 6,
20068 Peschiera Borromeo (MI)

Sassuolo Plant (MO): Via Radici in Piano 558, Postal Code 41049

Tel: +39 0536 809711 Fax: +39 0536 809729 www.technokolla.com