
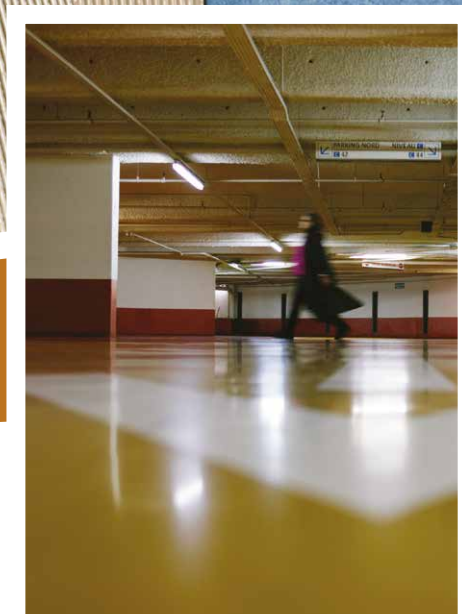


**rs 30**  
**01/15 166**

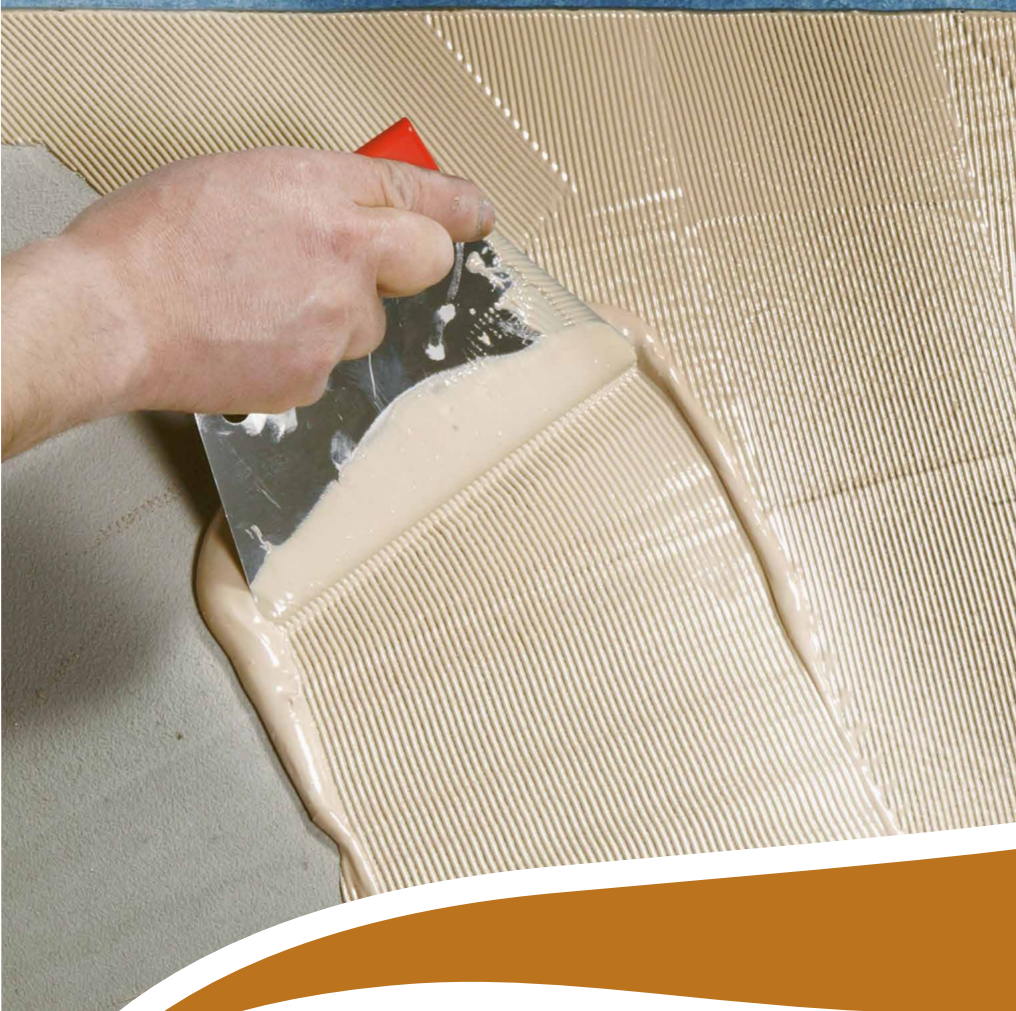


**RS 30**

Acrylic adhesive in watery dispersion with fast initial and residue bonding.

**fixing parquet and  
resilient materials**





10-30°C

25 min

2-3 mm

# rs 30



## MAIN FEATURES

Ready to use  
High performance  
Highly flexible  
Optimum workability

## APPEARANCE

Beige paste

## STORAGE

12 months in dry place at temperatures from +5 to +25°C

## FIELDS OF USE

- Fixing homogeneous or heterogeneous PVC, fitted carpeting and tufted carpets, cladding materials backed in latex foam, jute and linoleum in sections.

## SUBSTRATES

Cement-based screeds, cement-based and wood based plaster, fiber cement, concrete, cement-lime mortar, anhydrite screed.

## NATURE OF THE PRODUCT

RS 30 consists of acrylic resins in watery dispersion, selected mineral charges, specific additives. Ask the technical office for the safety brief containing further information.

## HOW TO PREPARE THE MIXTURE

RS 30 adhesive is ready to use. Just stir briefly after the bucket has been opened and then use the product.

## APPLICATION

Spread adhesive on substrate only, using the special serrated trowel. Wait a few minutes (this time may vary, depending on the extent to which the substrate absorbs the product and the climatic conditions in the environment) for the adhesive to partially dry. It must be as dry as possible but still able to wet the back of the floor covering. Lay the floor covering by exercising uniform pressure all over the surface so as to eliminate any air pockets.



**fixing parquet and resilient materials**

## RECOMMENDED ACCESSORIES



**443312**

3x3 mm trowel

### CONSUMPTION

300/400 g/m<sup>2</sup> depending on conditions of substrate and thickness applied

### WARNINGS AND RECOMMENDATIONS

#### Do not apply:

- to screeds that have not been protected against rising damp (always apply a steam barrier between ground and screed)
- in places without windows or openings
- if the walls and ceiling in the room are not perfectly dry

#### Do not use:

- on non-absorbent substrates - use RS 90
- on screeds in TIMER-2 or similar - use RS 90
- do not add anything to the product
- rigid materials must be spread out in the room where they are to be laid and allowed to rest in order to eliminate warping that may have occurred while they were stored. This is particularly important during winter

### TECHNICAL DATA

### VALUE

Open time	* 25 min.
Treadable	*after 2-4 h
Surfaces ready for use	*after 24-48 h
Temperature during application	10-30 °C
Tools can be cleaned	Water

\* these time intervals refer to a temperature of 23°C-50% R.H.. They become shorter at higher temperatures and longer at lower temperatures.

### SPECIFICATION

Homogeneous or heterogeneous PVC, fitted carpeting and tufted carpets, cladding materials backed in latex foam, jute and linoleum in sections, must be fixed using fast-setting monocomponent adhesive in watery dispersion, such as TECHNOKOLLA's RS 30.

**Technokolla** reminds you to examine the “**notes**” document that completes the information in this data sheet. The document can be downloaded in the pdf format from the website [www.technokolla.com](http://www.technokolla.com).

The advice about technical matters in the technical data sheets, or given verbally or in writing by our personnel as part of our customer assistance service, is the result of our best and most up to date experience. Since we are unable to personally modify the conditions in the building site or the way the work is carried out, this information is purely indicative and, thus, binds us neither legally nor in any other way in relation third parties. This information does not relieve the end user from being responsible for testing our products so as to make sure they are fit for the required use. We therefore strongly advise the customer/user to subject Technokolla's products to preventive tests in order to ensure that they are suitable. The end user is also responsible for checking to make sure that this technical data sheet is not obsolete and that more recent editions have not replaced it. Thus, before using our products, you are advised to download the most up to date version of the technical data sheet from our web site [www.technokolla.com](http://www.technokolla.com).



### Sika Italia S.p.A.

Registered Office and Administrative Headquarters: Via L. Einaudi 6,  
20068 Peschiera Borromeo (MI)

Sassuolo Plant (MO): Via Radici in Piano 558, Postal Code 41049

Tel: +39 0536 809711 Fax: +39 0536 809729 [www.technokolla.com](http://www.technokolla.com)