


skycolors evolution

02/17 232

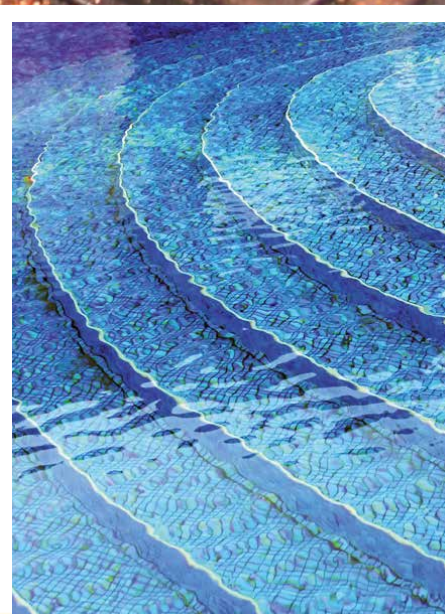

SKYCOLORS EVOLUTION

Two-component epoxy sealant.
Bright finish and unique colours.
Ideal for places where perfect hygiene is
required. For joints 1 to 15 mm wide.

**groutings
and sealants**

TECHNOKOLLA®





94/6



17



10-30°C



50 min



1-15 mm



skycolors evolution



MAIN FEATURES

- Optimum workability and easy use
- Non-absorbent
- Glossy finish
- Optimum cleanability
- Uniform shades. Colorfast over time
- Stain resistant
- High degree of hardness
- Good chemical resistance (see table)
- Guaranteed all-over visual effect

APPEARANCE

- Comp. A: thick paste in 17 colours (see colour card in www.technokolla.com)
- Comp. B: viscous liquid

STORAGE

24 months in dry place at temperatures from 10 to 30°C

FIELDS OF USE

- Grouting joints in ceramic floors of all types, such as: ceramic or glass mosaic, porcelain stoneware, split tiles, natural stone*.
- In places where an attractive appearance is essential and/or places subject to chemical aggression, such as: Spas, wellness centers, spa pools, swimming pools, bathrooms, kitchen surfaces, etc.
- Suitable for grouting swimming pools, also when filled with seawater.
- SKYCOLORS EVOLUTION can be used as an adhesive (class R2 T in accordance with EN 12004) for glueing the above mentioned cladding materials to iron and fiberglass reinforced plastic.

* To make sure there is no change in colour, it is advisable to perform a cleanability test before grouting natural stone materials.

NATURE OF THE PRODUCT

SKYCOLORS EVOLUTION consists of two components based on epoxy resins, mineral charges and specific additives.

For further details, ask the technical office for the safety brief or download it from the website www.technokolla.com.



LOW-VOC
product

TESTED BY
EUROFINS



RECOMMENDED ACCESSORIES



Soft white felt

HOW TO PREPARE THE MIXTURE

SKYCOLORS EVOLUTION is a "reactive" sealant. This means that it sets through chemical reaction between two components, A and B. It is very important to thoroughly mix these components together. Proceed by pouring the liquid (comp. B) onto the paste (comp. A), then stir using a blender with a spiral whisk attachment. The reaction developed by these products is exothermic (heat develops). Remember that if the components are stirred at high speed, the heat developed will considerably speed up the hardening process thereby shortening the pot life of the product. The paste obtained is creamy and can be easily applied by trowel.

If required, glitter* can be slowly added until perfectly blended once components A and B have been mixed together.

* glitter in certain combinations of Skycolors Evolution may alter the final colour shade of the sealant.

GROUTING OPERATION

Use a rubber applicator to spread SKYCOLORS EVOLUTION. Make sure that the joints are filled completely throughout their depth. Wipe off any excess sealant with the edge of the applicator. Squeeze a sponge soaked in water over the grouted surface and emulsify the product with medium-hard felt by making circular movements over the surface. Take care not to empty the joint. Excess product can be easily removed with a soft rubber scraper. After cleaning, it is very important for the tile surface to be completely free from traces of grouting as it is very difficult to remove once hardened. Frequently rinse the sponge with clean water when cleaning.

AVAILABLE COLOURS

200 - neutral	205 - magnolia	210 - smoke	218 - cornflower
201 - ice white	206 - hazelnut	211 - slate	219 - Persian blue
202 - bright white	207 - dove	212 - ebony	
203 - milk white	208 - chocolate	215 - jade	
204 - cream	209 - pearl grey	217 - mauve	

GLITTER AVAILABLE

gold, silver, bronze, mother-of-pearl, fluo^o

^o To obtain the Phosphorescent effect, the product must "charge itself with light". It must not be used in places that are always without artificial light or sunlight. For maximum efficiency, fluo glitter should only be used with colours: neutral, ice white, bright white, milk white.

WARNINGS AND RECOMMENDATIONS

- do not attempt to use random percentages of the product: an incorrect catalysis ratio will compromise the hardening process
- do not use the product after it becomes difficult to apply. Prepare fresh mixture
- to avoid carbonatation, do not apply the product in difficult climatic conditions (e.g.: low temperatures or very damp conditions)
- the product is difficult to apply at temperatures below 12°C. Do not add anything to make the product more fluid
- spread the product rapidly in hot weather to prevent it from hardening too fast
- to prevent carbonatation, which would change the colour of the product, do not cover the surface immediately after grouting
- wait at least 24-48 hours before protecting the surface, depending on the ambient temperature and humidity
- wear rubber gloves at all times when using the product
- the consumption data refer to the following types of tiles: Single-fired tiles, Split tiles, Porcelain stoneware
- do not use on porous surfaces (e.g.: cotto)
- do not use SKYCOLORS EVOLUTION when there is water in the joints
- do not use for grouting subject to movement
- do not wash with acid or strong oxidizing substances during application
- perform a cleanability test before applying the product to surfaces with patterns or inserts
- do not allow washing water to remain on freshly applied grouting
- prolonged contact with acids and oxidants creates colour changes

CONSUMPTION grouting g/m²

TILE in cm	JOINT in mm					
	2	3	4	6	8	10
Glass mosaic 2x2x0.38	1500					
2x2x0.4	1300					
5x5x0.4	500	770	1000			
10x10x0.6	380	580	770	1150	1550	1900
7.5x15x0.7	450	680	900	1350	1800	2200
15x15x0.9	380	580	770	1150	1550	1900
20x20x0.9	290	430	580	900	1150	1400
12x24x0.9		540	720	1100	1400	1800
12x24x1.4		840	1100	1700	2200	2800
20x30x0.9	240	360	480	720	960	1200
30x30x1	210	320	430	640	850	1100
30x60x1	160	240	320	480	640	800
40x40x1	160	240	320	480	640	800
50x50x1	130	190	260	390	510	640
60x120x1.1	90	130	180	270	350	440

CONSUMPTION CALCULATION FORMULA

$$A \times B \times \left[\frac{C+D}{C \times D} \right] \times 160 = \frac{g}{m^2}$$

in mm in cm



TECHNICAL DATA	VALUE	REQUIREMENT	STANDARD
Mixing ratio	(A:B) 94:6		
Application temperature allowed	min. +10°C, max +30°C		
Suggested application temperature	min. +12°C, max +25°C		
Pot life	*45 min		
Treadable	*24 h		
Surface can be used after	*7 days		
Thermal resistance	**from -20 °C to + 100°C		
Abrasion resistance	≤ 250 mm ³	≤ 250 mm ³	EN 12808-2
Flexural strength after dry storage	≥ 30 N/mm ²	≥ 30 N/mm ²	EN 12808-3
Compressive strength after dry storage	≥ 45 N/mm ²	≥ 45 N/mm ²	EN 12808-3
Shrinkage	≤ 1.5 mm/m	≤ 1.5 mm/m	EN 12808-4
Water absorption after 240 min.	≤ 0.1 g	≤ 0.1 g	EN 12808-5
Initial bond	5.1 N/mm ²	≥ 2 N/mm ²	EN 12003
Bond after immersion in water	3.2 N/mm ²	≥ 2 N/mm ²	EN 12003
Bond after thermal shock	2.7 N/mm ²	≥ 2 N/mm ²	EN 12003
Creep	≤ 0.5 mm	≤ 0.5 mm	EN 1308
Open time	* 20 min.	° 20 min.	EN 1346

* these time intervals refer to a temperature of 23°C-50% R.H. . They become shorter at higher temperatures and longer at lower temperatures.

** the maximum temperature is to be understood as an occasional service and not as a continuous one.

SPECIFICATION

Ceramic floor and wall tiles must be sealed using glossy-finish epoxy-based grouting with high chemical resistance, such as Technokolla's SKYCOLORS EVOLUTION, which can be used to grout joints up to 15 mm wide.

Technokolla reminds you to examine the “notes” document which completes the information in this data sheet. The document can be downloaded in the pdf format from the website www.technokolla.com.

The advice about technical matters in the technical data sheets, or given verbally or in writing by our personnel as part of our customer assistance service, is the result of our best and most up to date experience. Since we are unable to personally modify the conditions in the building site or the way the work is carried out, this information is purely indicative and, thus, binds us neither legally nor in any other way in relation third parties. This information does not relieve the end user from being responsible for testing our products so as to make sure they are fit for the required use. We therefore strongly advise the customer/user to subject Technokolla's products to preventive tests in order to ensure that they are suitable. The end user is also responsible for checking to make sure that this technical data sheet is not obsolete and that more recent editions have not replaced it. Thus, before using our products, you are advised to download the most up to date version of the technical data sheet from our web site www.technokolla.com.

skycolors evolution

CHEMICAL RESISTANCE OF CERAMIC TILING GROUTED WITH SKYCOLORS EVOLUTION

TECHNICAL DATA				
GROUP	NAME	CONCENTRATION %	CONTINUOUS SERVICE 20°C	DISCONTINUOUS SERVICE 20°C
ACIDS				
	Acetic	2,5	-	(+)
	"	5	-	-
	"			
	Hydrochloric	37	(+)	+
	Chromic	20	-	-
	Citric	10	-	-
	Formic	2,5	-	(+)
	"	10	-	-
	Lactic	2,5	-	(+)
	"	5	-	-
	"			
	Nitric	25	(+)	+
	"	50	-	-
	Oleic			-
	Phosphoric	50	-	(+)
	"	75	-	-
	Sulphuric	1,5	+	+
	"	50	(+)	+
	"	98	-	-
	Tannic	10	(+)	+
	Tartaric	10	(+)	+
	Oxalic	10	+	+
ALKALIS AND SATURATED SOLUTIONS				
	Ammonia	25	+	+
	Caustic soda	50	+	+
	Potash	50	-	(+)
	Sodium hypochlorite			
	Active chlorine	6,5 g/l	(+)	+
	Active chlorine	162 g/l	-	-
SATURATED SOLUTIONS				
	Sodium hyposulphite		+	+
	Sodium chloride		+	+
	Calcium chloride		+	+
	Iron chloride		+	+
	Aluminium sulphate		+	+
	Sugar		+	+
	Hydrogen peroxide	1	(+)	+
	"	10	(+)	+
	Sodium bisulphite		(+)	+
OILS AND FUELS				
	Gasoline		+	+
	Petroleum		+	+
	Diesel fuel		+	+
	Olive oil		+	+
SOLVENTS				
	Ethyl alcohol	15	-	(+)
	Acetone		-	-
	Glycol		+	+
	Glycerine		+	+
	Perchloroethylene		-	-
	Trichloroethane		-	-
	Trichloroethylene		-	-
	Methylene chloride		-	-
	Toluol		-	-
	Benzol		-	-
	Xylol		-	-

KEY: + Optimum resistance (+) Fair resistance - Poor resistance

NOTE. The table no longer applies if glitter has been added.



Sika Italia S.p.A.

Registered Office and Administrative Headquarters: Via L. Einaudi 6, 20068 Peschiera Borromeo (MI)

Sassuolo Plant (MO): Via Radici in Piano 558, Postal Code 41049

Tel: +39 0536 809711 Fax: +39 0536 809729 www.technokolla.com