

tc-lax
07/16 112



TC-LAX

Synthetic rubber-based tackifier latex for cement-based mortar and adhesives.

**bonding agents
and adhesives**



tc-lax



MAIN FEATURES

High bonding performance

APPEARANCE

White liquid

STORAGE

12 months in dry place, protected from freezing and high temperatures

FIELDS OF USE

Highly bonding adhesive

Pour TECHNOS+ or TECHNOLA or TECHNO-XL powder into the latex. It is essential to use this mixture in the following cases:

- fixing tiles on old ceramic or stone floors, also outdoors
- fixing large, stable, natural stone tiles not affected by humidity, also on façades
- precast concrete or concrete cast on site.
- fixing tiles or natural stone not affected by humidity, to plasterboard. Use of Primer-T prior to fixing is not essential, but recommended.

Adhesive cement-based mortars for repairing or leveling walls and floors


Mortar formed by a mixture of cement and sand in 1:3, 1:4 ratios must be blended with the liquid obtained by diluting TC-LAX and water in 1:2 ratio (one part in volume and two parts of water). The sand grains should not be more than 2 mm in diameter.

High performance screeds

Blend mortar formed by cement and sand in 1:7 ratio with the liquid obtained by diluting TC-LAX in 1:3 ratio with water. The screed obtained with TC-LAX will be more consistent and will possess higher mechanical strength than one formed by using water alone.

Adhesive cement grouting

For casting joints or creating fixed screeds. The cement grouting is made by diluting TC-LAX in 1:1 ratio with water, and adding Portland cement to this solution to obtain paste that can be applied by brush. The mortar must be cast wet-on-wet.

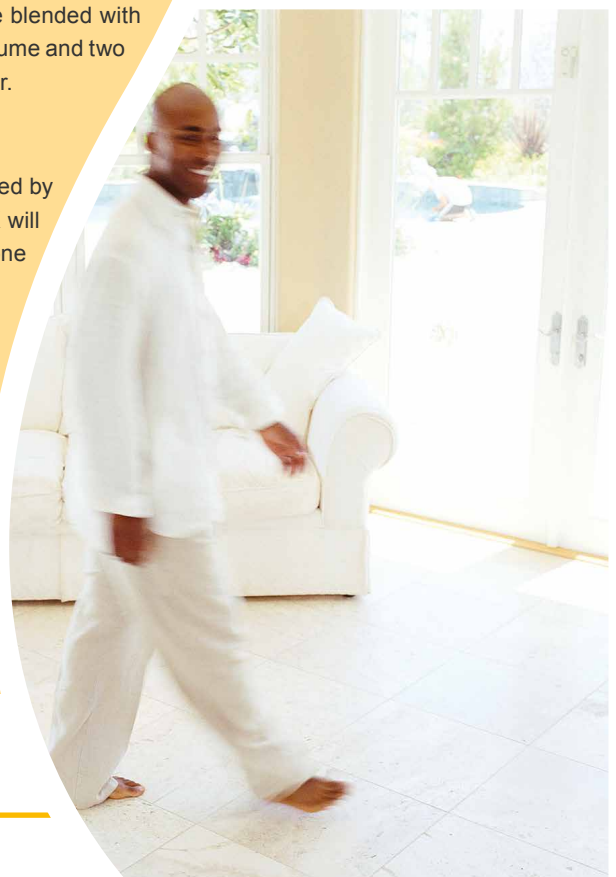

Plaster rendering

Dilute TC-LAX in 1:1 ratio with water. Prepare a mixture of sand and cement in 1:1 weight ratio. The sand used for rendering should have a discontinuous curve reaching up to 3 mm in diameter at most (e.g.: 01 mm and 2-3 mm, to create a rougher appearance and increase the bonding surface). Rendering must be applied to smooth surfaces like concrete, or when the plaster applied afterwards must be covered with tiles or marble.

Plastered surfaces

Dilute TC-LAX in 1:4 ratio with water. Prepare a mixture of sand and cement in 1:4 weight ratio. Choose the sand used for plastering to suit the thickness required. By and large the diameter will be 2-3 mm at most. Now blend the sand-cement mixture with the previously diluted latex to obtain a plastic paste.

Adhesives and plaster blended with TC-LASTIC can be applied straight onto:

cement-based plaster, cement-lime mortar, cement-based screeds, concrete, bricks, old ceramic floors*.

* only for adhesives

NATURE OF THE PRODUCT

TC-LAX consists of synthetic resins and specific additives in watery dispersion.

For further details, ask the technical office for the safety brief or download it from the web site www.technokolla.com.

WARNINGS AND RECOMMENDATIONS

Do not use:

in mixtures with lime alone as a binder.

Consult the technical data sheets of the products mentioned for further details about use of TC-LAX.

DOSES AND USES

USE	Weight ratio TC-LAX : water	Weight ratio cement : sand	Mixture consistency
Adhesive cement-based mortars	1:2	1:3 1:4	Plastic
High performance screeds	1:3	1:7	Wet/plastic earth
Adhesive cement grouting	1:1	Cement only	Fluid
Plaster rendering	1:1	1:1	Very soft
Plaster	1:4	1:4	Plastic

TECHNICAL DATA

pH	~6.7
Weight density	~1.01
Inflammability	No

TECHNICAL SPECIFICATIONS OF PRODUCTS MODIFIED WITH TC-LAX

	Unit of measurement	TECHNOS+	TECHNOLA	TECHNO-XL	Standard			
Mixing ratio	l x bag	7	6.8	6.8				
Pot life	min *	~80	~80	~80				
Open time	min *	20	30	20	EN 1346			
Creep on vertical wall	mm	-	≤ 0.5	≤ 0.5	EN 1308			
Deformability	mm	~3.8	~4.0	> 3.9	EN 12002			
Classification		C2 S1	C2TE S1	C2T S1	EN 12004			
Thermal resistance	from -40C° to +120°C							
		GREY	WHITE	GREY	WHITE	GREY	WHITE	EN 1348
Bond after 28 days	N/mm ²	1.2	~2.1	~2.2	~2.5	2.0	1.7	EN 1348
Bond after the action of heat	N/mm ²	2.0	~3.0	~3.1	~3.5	2.2	2.0	EN 1348
Bond after the action of water	N/mm ²	1.2	~1.5	~1.3	~1.3	1.1	1.7	EN 1348
Bond after freezing/thawing cycles	N/mm ²	1.4	~1.8	~1.2	~1.4	1.3	1.0	EN 1348

* These time intervals refer to a temperature of 23°C–50% R.H.
They become shorter with higher temperatures and longer at lower temperatures.

SPECIFICATION

TECHNOS+, TECHNOLA and TECHNO-XL cement-based adhesives must be mixed with synthetic rubber latex such as TECHNOKOLLA's TC-LAX, which improves bonding ability without altering the application characteristics.

Technokolla reminds you to examine the “notes” document that completes the information in this data sheet.
The document can be downloaded in the pdf format from the website www.technokolla.com.

The advice about technical matters in the technical data sheets, or given verbally or in writing by our personnel as part of our customer assistance service, is the result of our best and most up to date experience. Since we are unable to personally modify the conditions in the building site or the way the work is carried out, this information is purely indicative and, thus, binds us neither legally nor in any other way in relation third parties. This information does not relieve the end user from being responsible for testing our products so as to make sure they are fit for the required use. We therefore strongly advise the customer/user to subject Technokolla's products to preventive tests in order to ensure that they are suitable. The end user is also responsible for checking to make sure that this technical data sheet is not obsolete and that more recent editions have not replaced it. Thus, before using our products, you are advised to download the most up to date version of the technical data sheet from our web site www.technokolla.com.



Sika Italia S.p.A.

Registered Office and Administrative Headquarters: Via L. Einaudi 6,
20068 Peschiera Borromeo (MI)

Sassuolo Plant (MO): Via Radici in Piano 558, Postal Code 41049

Tel: +39 0536 809711 Fax: +39 0536 809729 www.technokolla.com